

1. GO TO WWW.J2KIP.COM FOR REGISTRATION.

(1)GO TO TOOLS >INTERNET OPTIONS

(2)CLICK ON THE SECURITY TAB

(3)CLICK ON THE TRUSTED SITES ICON


(4)CLICK ON THE SITES BUTTON

(5)UNCHECK THE BOX NEXT TO "REQUIRE SERVER VERIFICATION".

(6)ON THE ADD THIS WEBSITE TO THE ZONE BOX, PUT DOWN WWW.J2KIP.COM.

(7)CLICK ON THE ADD BUTTON

CLICK ON THE OK BUTTON

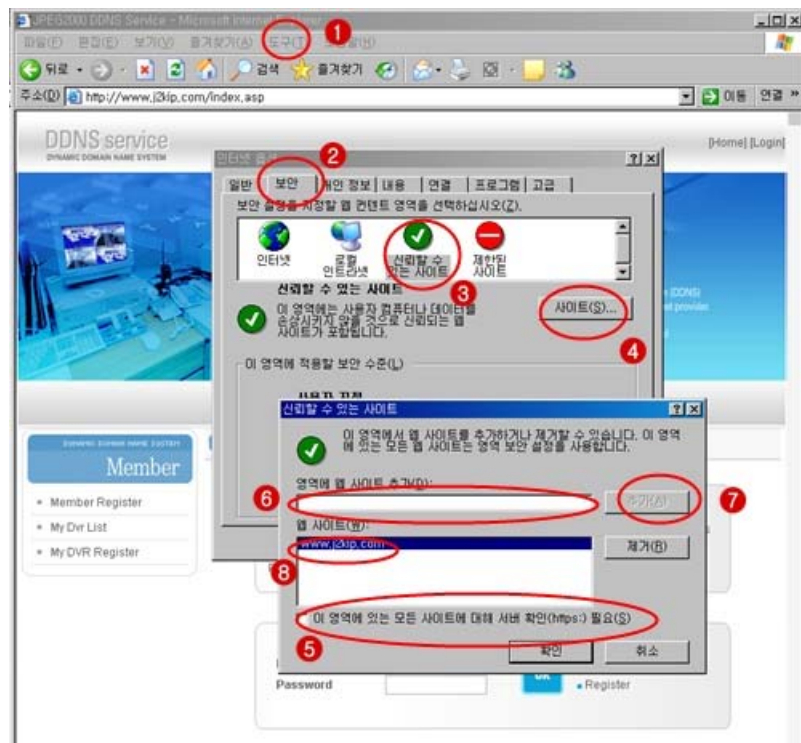

2. CLICK ON THE REGISTER



3. FILL OUT THE INFORMATION ON (2), AND CLICK ON (1) TO REGISTER.

Member Register > New user

* ID and Password must be three characters or more
 * We use User Email address to send information(User ID and Password) about your account.

1	Member Id	demotest
2	User Email	gun122@arguscctv.com
3	User Password	****
4	Confirm Password	****
		confirm 5

4. WHEN YOU ARE DONE WITH THE REGISTRATION, GO TO LOGIN PAGE AND LOG ON

This website was created to provide a dynamic domain name system (DDNS) that allows DVR Systems to operate without a static IP from an Internet provider. This has been created exclusively for use with the line of products. Complete the registration process to add your DVR to the system and enjoy the many benefits of DDNS.

Member ID	demotest	ok	Forgot Password Register
Password	****		

5. CLICK ON THE DVR ADD BUTTON(1) TO ADD YOUR DVR

My DVR List

* Click Web-Viewer icon on the right side of ACT to operate Web-Viewer.
 * You should add www.j2kip.com on Trusted Sites(Tools -> Internet Options -> Security) at first webviewer installation.
 * Webviewer Webbackup Dvr Edit Dvr Delet


DVR Name Confirm DVR Add 1

No	Name	MAC	IP-Port	Last Modified	Act
No Data					


6. NAME YOUR DVR(1), AND PUT DOWN MAC ADDRESS OF YOUR DVR(2).

* Mac Address should be listed correctly without dash "-".
 * Mac Address already listed can not be registered again.

1	DVR Name	demo
2	MAC Address	000aa2000c05 * without dash "-"
	IP Address	<input type="text"/>
	IP Port	<input type="text"/>
		Confirm 3

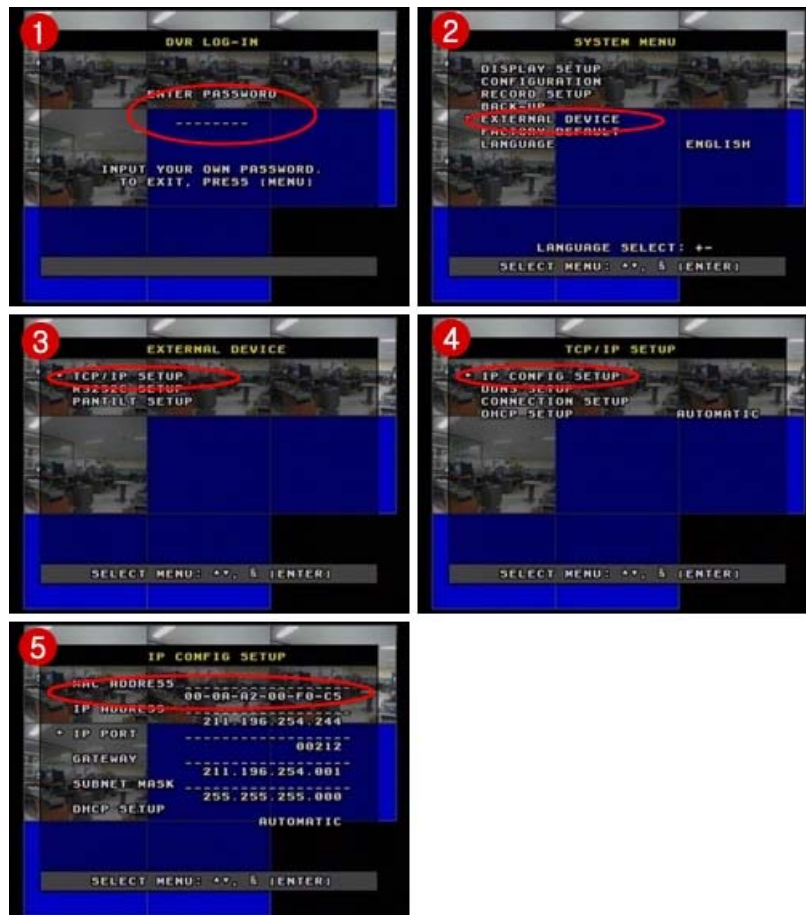


7. CHECK WHETHER YOUR DVR HAS BEEN REGISTERED AT THE MY DVR PAGE

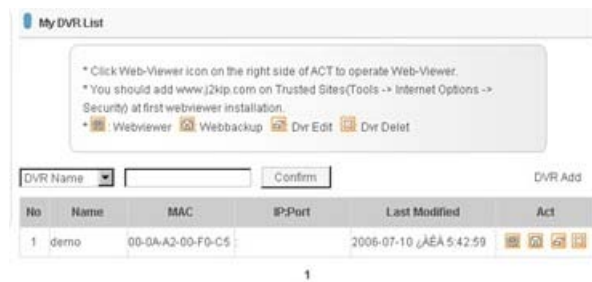

8. TEST THE DDNS SETTINGS IN YOUR DVR.

- SET TO ON FOR THE DDNS SETTING AT THE DDNS PAGE OF YOUR DVR
- CHECK WHETHER IT IS GETTING A RIGHT DNS SERVER
- SET YOUR INTERVAL(IP UPDATE TIME INTERVAL)
- MOVE THE CURSOR TO REGISTER AND PRESS ON THE ENTER KEY TO REGISTER.
- CHECK THE MESSAGE "SUCCESS TO REGISTER DVR INFO" AT THE VERY BOTTOM OF THE PAGE.

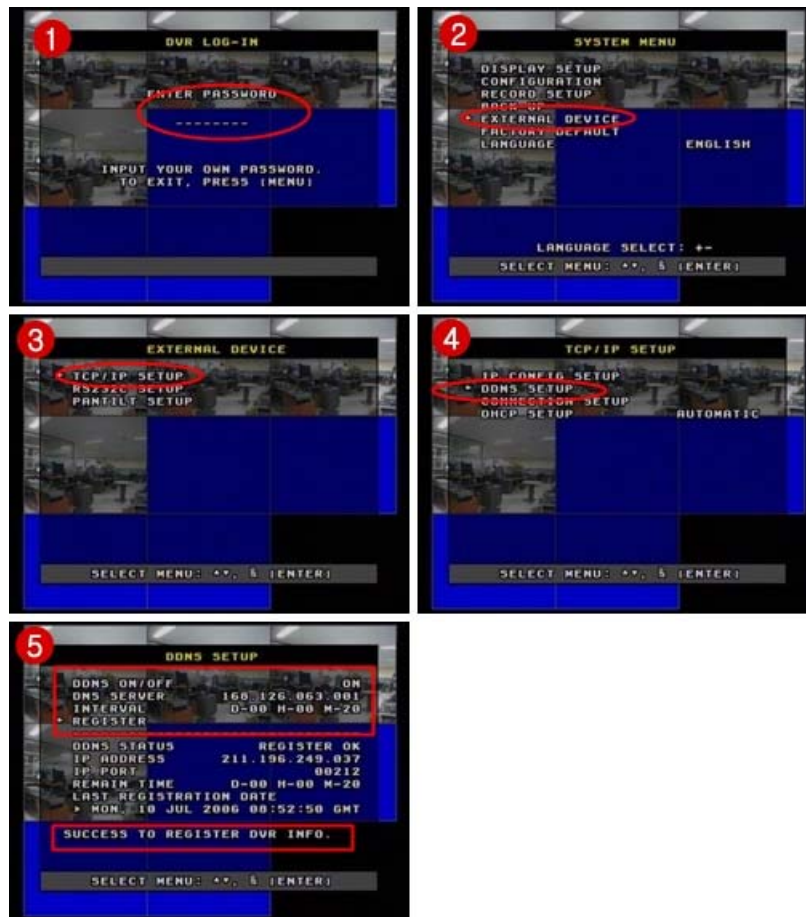

9. CHECK WHETHER YOUR DVR'S IP ADDRESS AND THE PORT HAVE BEEN REGISTERED CORRECTLY AT THE MY DVR PAGE OF WWW.J2KIP.COM



10. CLICK ON THE VIEWER BUTTON(2)


*IF YOUR COMPUTER ASKS TO INSTALL ACTIVE X CONTROL, YOU MUST CLICK ON YES

**ONCE THE INSTALLATION FOR THE ACTIVE X IS DONE, THEN CLICK ON THE CONNECT



1.RUN THE CLIENT SOFTWARE

- 1)GET INTO THE SETUP WINDOW BY PRESSING ON THE SETTING BUTTON
- 2)CLICK ON THE DDNS TAB(3), AND CHOOSE DDNS OPTION(2)

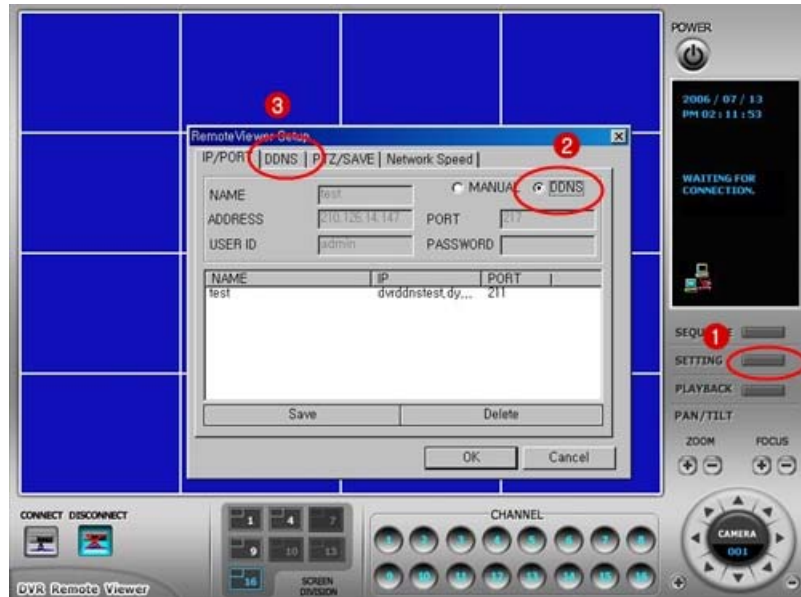

2. SETTING UP DDNS

- 1)MOVE TO DDNS WINDOW
- 2)PUT IT IN A USER NAME FROM WWW.J2KIP.COM
- 3)PUT IT IN A DVR NAME FROM WWW.J2KIP.COM
- 4)SAVE THE INFORMATION (YOU CAN LOAD UP THE SAME INFO LATER)
- 5)CLICK ON THE CONNECT BUTTON AT THE DVR INFO
- 6)CHECK WHETHER YOU HAVE IP ADDRESS AND PORT
- 7)CLICK ON OK BUTTON TO CLOSE THE WINDOW
- 8)CLICK ON THE CONNECT BUTTON TO LOG ON

